


TEST AND GARAGE EQUIPMENT

3600



3200

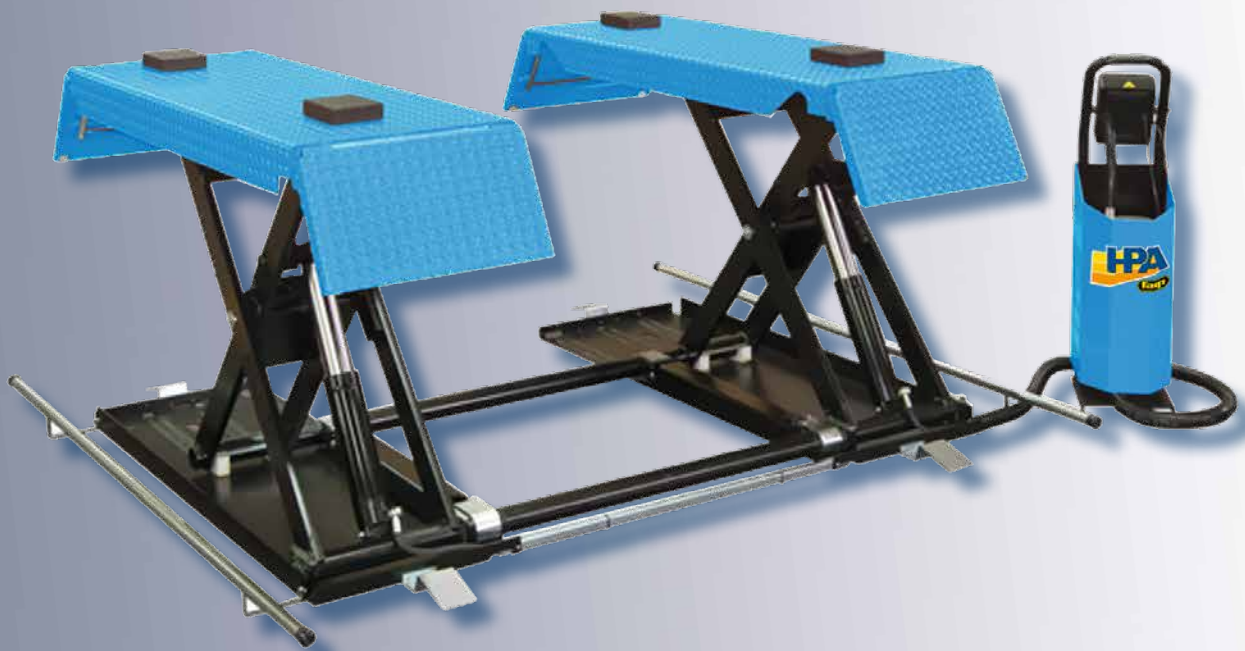

Reversible low-profile electrohydraulic scissors lift for **cars, SUVs and vans**; ideal for tyre specialists, car workshops, and body repairers. Runway levelling guaranteed by 2 sturdy anti-torsion connection bars. Low voltage control unit with **"dead-man" control system**. Available in on-floor and flush installation versions.


HPA

faip



Reversible low-profile
electrohydraulic scissors lift

SUPERLIFT 36-1XC B
SUPERLIFT 32-1XC B

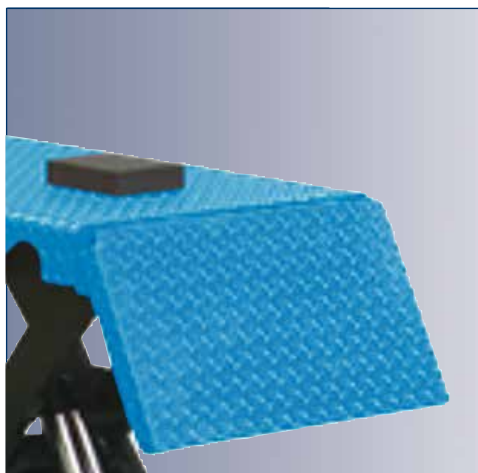

Technical data

Model	Superlift 36-1XC B	Superlift 32-1XC B
<input type="checkbox"/> Lift capacity	3600 kg	3200 kg
<input type="checkbox"/> Lifting time	25 s	
<input type="checkbox"/> Three phase motor	400/230V - 3kW - 3ph - 50 /60 Hz	
<input type="checkbox"/> Single phase motor	230V - 3kW - 1ph - 50 /60 Hz	
<input type="checkbox"/> Max. lifting height	1000 mm	
<input type="checkbox"/> Lift minimum height	115 mm	

Runways with suspended flaps which also act as vehicle access ramps.




Supplied accessories

All models supplied with:


- Automatic engagement of mechanical safety locks with pneumatic release system.
- Anti-crushing foot guard.
- Set of 4 rubber pads.

Optional accessories

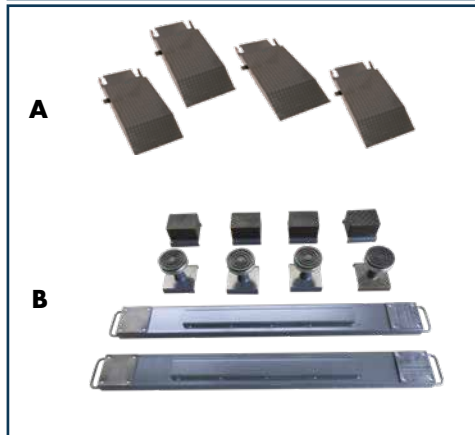

- A.** Extension ramps set (Optional)
- B.** Pair of cross pieces and pads for off-road vehicles

Dimensions

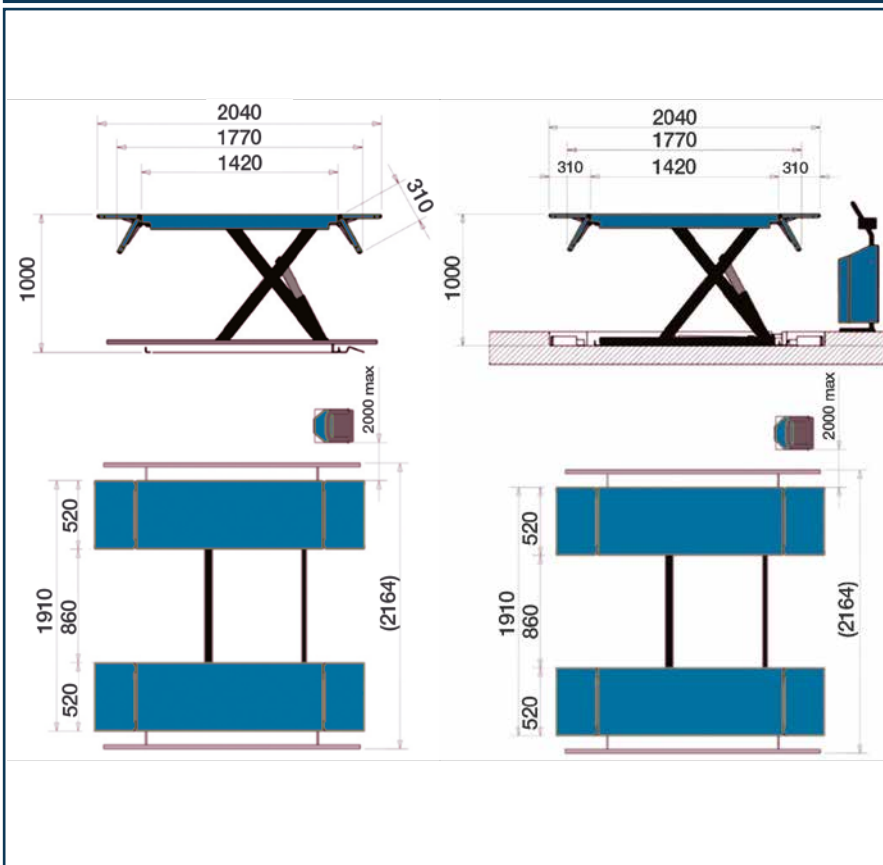

The illustrations, configurations and technical features in this publication are intended to present the product only, and are subject to variation. To ensure correct ordering, always refer to the current price list.

