

HPA

faip



Low-profile
roller brake testers
for light and HD vehicles

GLOBAL Line

GLOBAL Line is the new range of HPA-Faip brake testers able to satisfy the testing needs of automotive professionals: from independent pre-check workshops, to specialized testing centres, for both light and HD vehicles.

GLOBAL Line features a compact design of roller benches which meets the different layout demands of modern workshops, combining advanced technology (manual/automatic operation, start-up monitoring, slip switchoff, switch-off after driving out of the test bench) and smart solutions (pointer display or SW interface on PC).

ROLLER BRAKE TESTERS for Cars & Transporter Vehicles



R-BL C30




Track: **820-2.160 mm**
 Roller diameter: **167 mm**
 Testing speed: **2,6 Km/h**
 Braking power: **2,6 kN**
 Motors: **2 x 2,4 kW**
 Testable axle load: **2,6 t**
 Voltage: **3Ph/400V/50Hz**
 Rollers: **welded surface**

R-BL C35



Track: **800-2.200 mm**
 Roller diameter: **205 mm**
 Testing speed: **5 Km/h**
 Braking power: **4,5 kN**
 Motors: **2 x 3 kW**
 Testable axle load: **2 t**
 Voltage: **3Ph/400V/50Hz**
 Rollers: **gritted coated**

R-BL C60

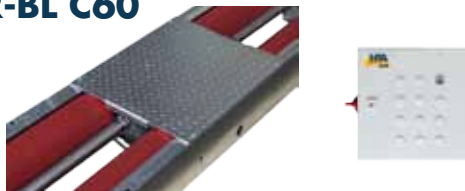


Track: **800-2.800 mm**
 Roller diameter: **205 mm**
 Testing speed: **5 Km/h**
 Braking power: **6 kN**
 Motors: **2 x 4 kW**
 Testable axle load: **2,6 t**
 Voltage: **3Ph/400V/50Hz**
 Rollers: **gritted coated**

Pointer display



Features - Accessories

SW for PC



USB converter



IR remote control



Gritted coated rollers



Welded rollers



ROLLER BRAKE TESTERS for Truck



R-BL C130




Track: **800-2.800 mm**
 Roller diameter: **205 mm**
 Testing speed: **2,6 Km/h**
 Braking power: **32 kN**
 Motors: **2 x 7,5 kW**
 Testable axle load: **12 t**
 Voltage: **3Ph/400V/50Hz**
 Rollers: **gritted coated**

Pointer display



Features - Accessories

SW for PC



LED display




IR remote control




USB converter



Gritted coated rollers



R-BL T130

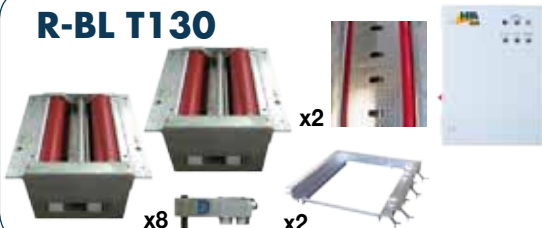

Twin Rollers Set
 Track: **800-2.800 mm**
 Roller diameter: **205 mm**
 Testing speed: **2,6 Km/h**
 Braking power: **32 kN**
 Motors: **2 x 7,5 kW**
 Testable axle load: **12 t**
 Voltage: **3Ph/400V/50Hz**
 Rollers: **gritted coated**

The illustrations, configurations and technical features in this publication are intended to present the product only, and are subject to variation. To ensure correct ordering, always refer to the current price list.

