

P2C 255 C

P2C 245 C

Electro-hydraulic two post lifts with top connections

Possibility of installation in symmetrical or asymmetric version



5500



4500



HPA

faip






Electro-hydraulic two post lifts with top connections. Possibility of installation in **symmetrical** or **asymmetric** version. Realignment of the two carriages using metal cables that guarantee excellent synchronisation.

Standard height of two-post connection: 4,050 mm.

Available versions (with optional column extension set):

- **V**: Specific for vans (Height of two-post connection: 4,620 mm).

- **XV**: Specific for vans and very high vehicles, extra-high version (Height of two-post connection: 5,220 mm).



Internally reinforced column structure for little bending and internal cable guiding.



Electro magnet safety release 24V.



Rubber door protections. **Toothed sector arm** rotation stop system.



Four **three-section symmetrical** arms.

TECHNICAL DATA

	P2C 255 C	P2C 245 C
Lift capacity	5500 kg	4500 kg
Lifting time	45 s	45 s
Motor	400/230V-3kW-3ph-50 Hz	400/230V-3kW-3ph-50 Hz
Lift max. lifting height	2062 mm	2062 mm
Max. locking position	1957-2037 mm	1957-2037 mm
Lift minimum height	115 mm	115 mm
Height connection	4050/4620/5520 mm	4050/4620/5520 mm


SUPPLIED ACCESSORIES

- Safety stop-bar included as standard.
- Two set of extension pads.

OPTIONAL



- A** - Column extension set
- B - 8-43300021** Set of 4 extension for pads, H=35 mm
- C - 8-43300014** Set of 4 extension for pads, H=80 mm
- D - 8-43300015** Set of 4 extension for pads, H=140 mm
- E - 8-43300016** Set of 4 adapters for Mercedes Sprinter

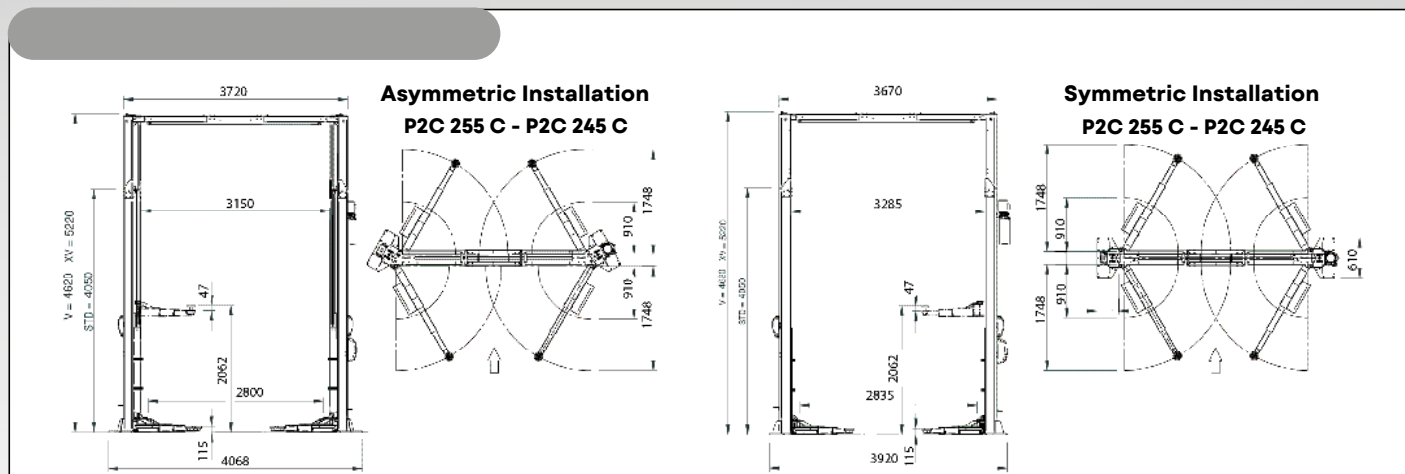

The manufacturer reserves the right to modify the features of its products at any time.



NEXION S.p.A.
www.hpa-faip.it - info@hpa-faip.it

Designed in
 ITALY